


# FOREND EU

## E.S.E. Lightning Conductor

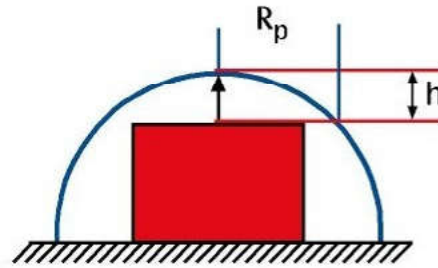

### Protection Capacity

Rp (m)		( $\Delta L=60m$ )			
h(m)	Np	I	II	III	IV
2		31	35	39	43
4		63	69	78	85
5		79	86	97	107
6		79	87	97	107
8		79	87	98	108
10		79	88	99	109
20		80	89	102	113
30		80	90	104	116
60		80	90	105	120



ISO 14001:2004  
OHSAS 18001:2007  
ISO 27001:2013



LCOE  
LABORATORIO CENTRAL  
OFICIAL DE  
ELECTROTECNIA



Ref. No: F10110  
Material: 316L Stainless Steel  
Standard: NFC 17-102:2011  
ESEAT Eff.:  $\Delta T=60\mu s$   
Height: 63 cm  
Weight: 5,000 kg  
Packaging (Cylinder)  
Diameter: 21 cm  
Height: 70 cm  
Weight: 2,000 kg