

# Technical data sheet

Combination arrester V25, 3-pole + NPE 280 V with remote signalling  
Item no. 5094510



Combination arrester, lightning and surge arrester type 1+2

- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Universally suitable for TN and TT systems
- With remote signalling and potential-free NO contact for function monitoring
- Plug-in arrester with dynamic cut-off unit
- Visual function display
- Voltage protection level < 0.9 kV
- Encapsulated, non-extinguishing zinc oxide varistor arrester for use in standard distributor housings
- Labelled connections
- FS variant with remote signalling contact (potential-free NO contact)


Application example: Buildings with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.



Additional product text 1

\* Complete = Plug-in arrester and base

## Dimensions

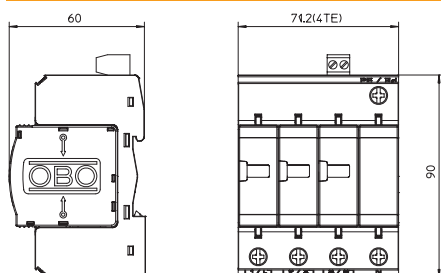

## Master data


Item no.	5094510
Type	V25-B+C 3+NPE-FS
Description 1	CombiController V25
Description 2	3+1 with remote signalling
Dimension	280V
Smallest sales unit (VG)	1,00 Piece
Weight	52.50 kg/100 pc.

# Technical data sheet

Combination arrester V25, 3-pole + NPE 280 V with remote signalling  
Item no. 5094510



## Technical data

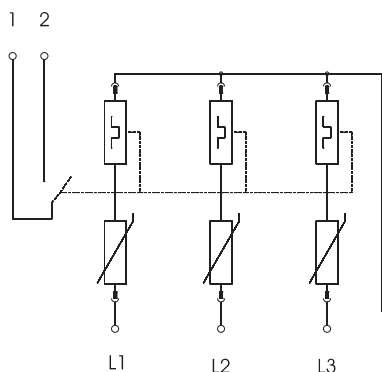

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Nominal voltage	230,00 V
Maximum continuous voltage AC	280,00 V
Max. continuous operating voltage	280,00 V
U max AC	150,00 V
U max DC	200,00 V
Nominal discharge current (8/20)	30 kA
Nominal discharge current (8/20 µs) [L-N]	30,00 kA
Nominal discharge current (8/20 µs) [N-PE]	30,00 kA
Maximum discharge current (8/20 µs)	150,00 kA
Impulse discharge current (10/350)	7,00 kA
Lightning impulse current (10/350) (N-PE)	25,00 kA
Lightning impulse current (10/350) (L-N)	7,00 kA
Lightning surge current (10/350)	25,00 kA
Arrester surge current (8/20) [total]	50,00 kA
Protection level	< 0,9 kV
Response time	< 25 ns
Maximum back-up fuse	160,00 A
Temperature range	-40+80 °C
Pole version	3+N/PE
Pole number	3,00
Version	3+NPE with FS
Version	3 + NPE
Protection rating	IP20
Protection rating	IP 20
Blow-out	<input type="checkbox"/>
Division unit TE (17.5 mm)	3
Remote signalling	<input checked="" type="checkbox"/>
Telecommunications contact	<input checked="" type="checkbox"/>
Connection cross-section, flexible	2,50 - 25,00 mm <sup>2</sup>
Connection cross-section, rigid	2,50 - 35,00 mm <sup>2</sup>
Connection cross-section, multi-wire	2,50 - 35,00 mm <sup>2</sup>
Signalling on device	None